

Model	L(mm)	H(mm)	Cut out(mm)
MQTL2053 3W	Ø68	35	Ø55
MQTL2053 7W	Ø85	45	Ø75
MQTL2053 10W	Ø110	70	Ø95
MQTL2053 15W	Ø140	78	Ø110

Benefits

- Ultra-slim design, Suitable for more wide range of installing height
- Long lifespan
- Professional optical design and LED selection, uniform and soft light, flicker free
- Damping shafts for flexible adjustment focus on lighting

170-240V	CRI >80	-20~40°C	IP20	IK02	3000K/4000K/6500K
----------	---------	----------	------	------	-------------------




Black


Model	W	PF	lm	BA		Single Box Dimensions (LxWxH)mm	Outer Box Dimensions (LxWxH)mm	Packing Qty (PCS/CTN)
MQTL2053 3W	3	0.5	240/270	24°	25000	/	/	100
MQTL2053 7W	7	0.5	560/630	24°	25000	/	/	100
MQTL2053 10W	10	0.5	800/900	24°	25000	/	/	100
MQTL2053 15W	15	0.9	1200/1350	24°	25000	/	/	60

Photometric Data


MQTL2053-3W

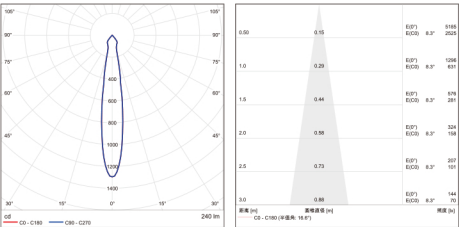

MQTL2053-7W

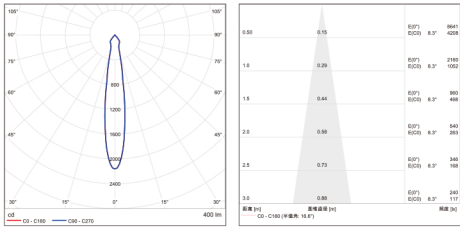

MQTL2053-10W

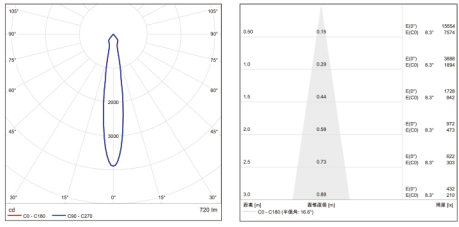

MQTL2053-15W

