

Model	L(mm)	H(mm)	Cut out(mm)
MQTL1201 7W	Ø90	55	Ø75
MQTL1201 12W	Ø105	65	Ø95
MQTL1201 18W	Ø140	75	Ø125
MQTL1201 24W	Ø177	95	Ø150
MQTL1201 35W	Ø230	120	Ø200

Benefits

- Die-cast aluminum housing for higher power and brightness
- Good heat dissipation, Long lifespan
- Micro prism lens or reflector for precise beam angle control


170-240V	CRI ≥80	-20~40°C	IP20	IK02	3000K/4000K/6500K
----------	---------	----------	------	------	-------------------




Model	W	PF	lm	BA	h	Single Box Dimensions (LxWxH)mm	Outer Box Dimensions (LxWxH)mm	Packing Qty (PCS/CTN)
MQTL1201 7W	7	0.5	415/460	60 °	25000	90*90*110	370*190*340	24
MQTL1201 12W	12	0.5	740/820	60 °	25000	132*132*83	408*275*340	24
MQTL1201 18W	18	0.5	1125/1250	60 °	25000	155*155*98	320*320*305	12
MQTL1201 24W	24	0.5	1620/1800	60 °	25000	193*193*100	405*405*315	12
MQTL1201 35W	35	0.5/0.9	2340/2600	60 °	25000	235*235*125	490*490*400	12

Photometric Data


MQTL1201-7W

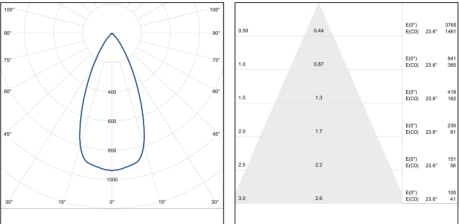


MQTL1201-12W

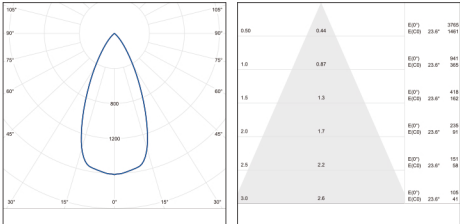

MQTL1201-18W

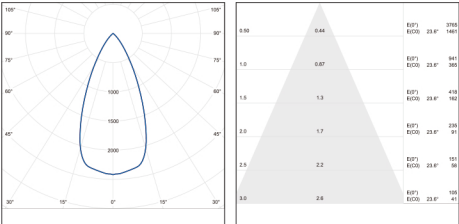

MQTL1201-24W

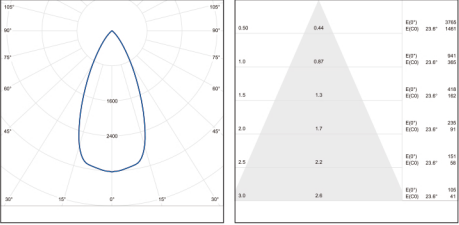

MQTL1201-35W

