

Model	L(mm)	H(mm)
MXTL2001 10W	Ø80	85
MXTL2001 20W	Ø100	105
MXTL2001 30W	Ø125	130
MXTL2001 50W	Ø150	170
MXTL2001 75W	Ø185	200

Benefits

- Die-cast aluminum housing for higher power and brightness
- Good heat dissipation, Long lifespan
- Micro prism lens or reflector for precise beam angle control


170-240V	CRI ≥ 80	-20~40°C	IP20	IK02	3000K/4000K/6500K
----------	----------	----------	------	------	-------------------




Model	W	PF	lm	BA		Single Box Dimensions (LxWxH)mm	Outer Box Dimensions (LxWxH)mm	Packing Qty (PCS/CTN)
MXTL2001 10W	10	0.5	630/700	15/24/36/50 °	25000	85*85*105	355*270*335	36
MXTL2001 20W	20	0.5	1260/1400	15/24/36/50 °	25000	105*105*125	440*215*395	24
MXTL2001 30W	30	0.5/0.9	1890/2100	15/24/36/50 °	25000	135*135*150	420*420*315	18
MXTL2001 50W	50	0.5/0.9	3150/3500	15/24/36/50 °	25000	165*165*190	515*345*395	12
MXTL2001 75W	75	0.5/0.9	4725/5250	15/24/36/50 °	25000	195*195*210	410*410*245	4

Photometric Data


MXTL2001-10W

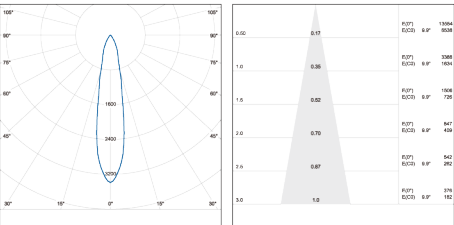


MXTL2001-20W

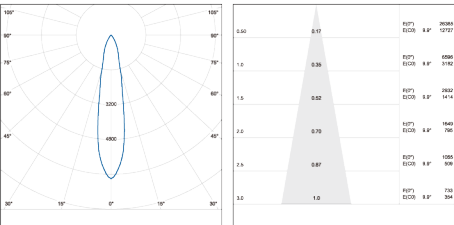

MXTL2001-30W

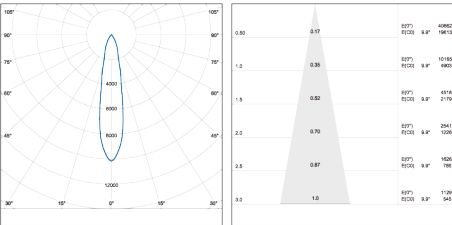

MXTL2001-50W

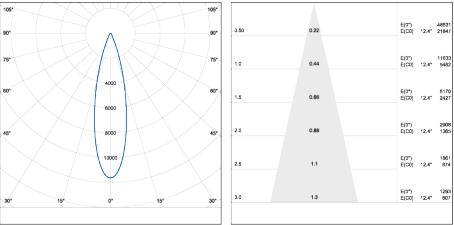

MXTL2001-75W

