

Model	L(mm)	H(mm)	Cut out(mm)
MQTL2026 10W	Ø85	75	Ø75
MQTL2026 15W	Ø114	85	Ø100
MQTL2026 25W	Ø138	130	Ø125
MQTL2026 35W	Ø165	140	Ø155

Benefits

- Die-cast aluminum housing for higher power and brightness
- Good heat dissipation, Long lifespan
- Micro prism lens or reflector for precise beam angle control
- Damping shafts for flexible adjustment focus on lighting


170-240V	CRI >80	-20~40°C	IP20	IK02	3000K/4000K/6500K
----------	---------	----------	------	------	-------------------




Model	W	PF	lm	BA		Single Box Dimensions (LxWxH)mm	Outer Box Dimensions (LxWxH)mm	Packing Qty (PCS/CTN)
MQTL2026 10W	10	0.5	580/650	15/24/36 °	25000	100*100*90	530*215*470	50
MQTL2026 15W	15	0.5	900/1000	15/24/36 °	25000	120*120*90	500*375*290	36
MQTL2026 25W	25	0.5/0.9	1440/1600	15/24/36 °	25000	135*135*120	562*425*260	24
MQTL2026 35W	35	0.5/0.9	2160/2400	15/24/36 °	25000	180*180*150	560*375*320	12

Photometric Data


MQTL2026-10W

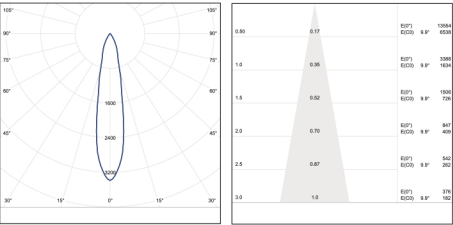

MQTL2026-15W

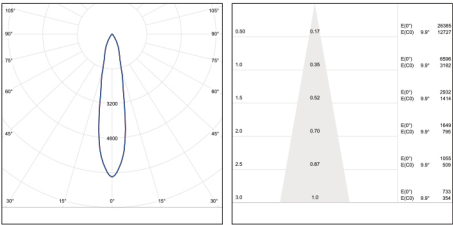

MQTL2026-25W

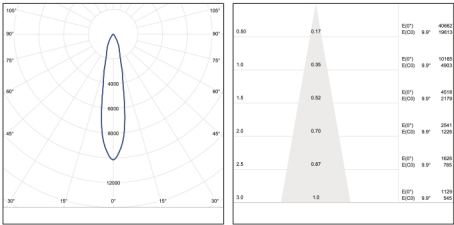

MQTL2026-35W

