


Classic | Downlight

MEGAMAN®

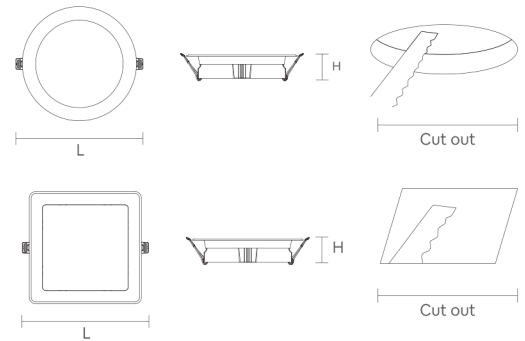

Benefits

- One-piece molding housing, simple and refined appearance
- A wide selection of size and shape, suitable for a wide range of die-cut
- Ultra-slim design, Suitable for more wide range of installing height
- sufacemount accessory optional
- Long lifespan

170-240V	CRI >80	-20~40°C	IP40	IK02	3000K/4000K/6500K
----------	---------	----------	------	------	-------------------




White


Model	W	PF	lm	BA		Single Box Dimensions (LxWxH)mm	Outer Box Dimensions (LxWxH)mm	Packing Qty (PCS/CTN)
MQTL1119-Y 5W	5	0.5	350/375	120°	15000	95*40*95	495*425*210	100
MQTL1119-Y 7W	7	0.5	490/525	120°	15000	110*40*110	570*425*240	100
MQTL1119-Y 9W	9	0.5	675/720	120°	15000	125*38*125	520*405*270	80
MQTL1119-Y 12W	12	0.5	900/960	120°	15000	150*36*150	470*385*320	60
MQTL1119-Y 15W	15	0.5	1200/1350	120°	15000	178*38*178	555*410*378	60
MQTL1119-Y 24W	24	0.5	1920/2160	120°	15000	222*38*222	465*410*465	40
MQTL1119-F 9W	9	0.5	675/720	120°	15000	148*38*125	612*400*275	80
MQTL1119-F 12W	12	0.5	900/960	120°	15000	173*42*153	540*450*325	60
MQTL1119-F 15W	15	0.5	1200/1350	120°	15000	200*40*178	625*430*380	60
MQTL1119-F 24W	24	0.5	1920/2160	120°	15000	245*40*223	510*430*470	40

Photometric Data


MQTL1119-5W

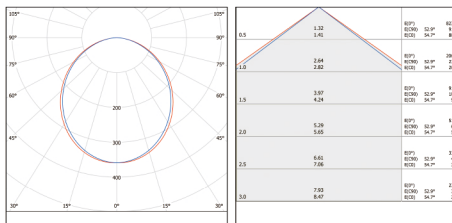


MQTL1119-7W

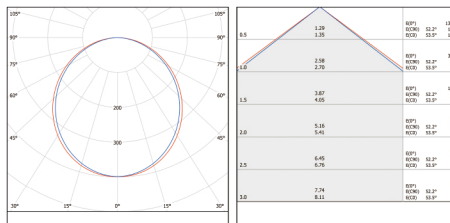


MQTL1119-9W

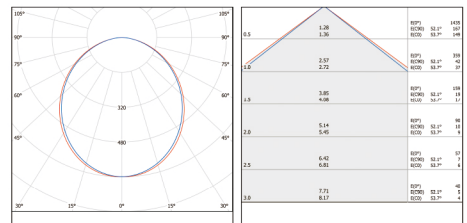

MQTL1119-12W

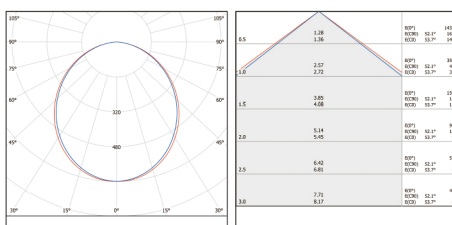

MQTL1119-15W

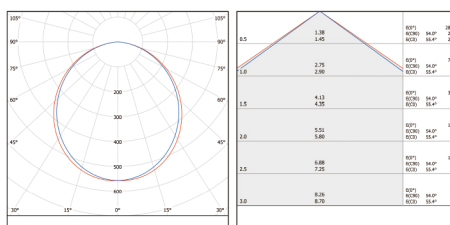

MQTL1119-24W

