


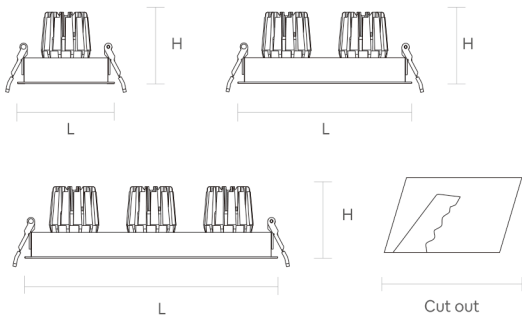

Model	L(mm)	H(mm)	Cut out(mm)
MQTL5001-LED8W	100*100	72	90*90
MQTL5001-LED8x2W	100*178	72	168*90
MQTL5001-LED8x3W	100*225	72	245*90

Benefits

- Die-cast aluminum housing for higher power and brightness
- Good heat dissipation, Long lifespan
- Micro prism lens or reflector for precise beam angle control
- Damping shafts for flexible adjustment focus on lighting

170-240V

CRI>80

-20~40°C

IP20

IK02

3000K/4000K/6500K



Model	W	PF	lm	BA	h	Single Box Dimensions (LxWxH)mm	Outer Box Dimensions (LxWxH)mm	Packing Qty (PCS/CTN)
MQTL5001-LED8W	8	0.5	600/640	15/24/36 °	25000	130*130*85	410*410*365	36
MQTL5001-LED8x2W	2X8	0.5	1200/1280	15/24/36 °	25000	205*130*85	425*410*365	24
MQTL5001-LED8x3W	3X8	0.5	1800/1920	15/24/36 °	25000	285*130*85	585*410*280	18

Photometric Data

