


Engineer | Downlight

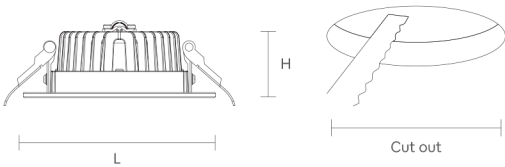

Model	L(mm)	H(mm)	Cut out(mm)
MQTL1080-X 7W	Ø90	42	Ø75
MQTL1080-X 10W	Ø120	48	Ø100
MQTL1080-X 20W	Ø170	49	Ø140
MQTL1080-X 30W	Ø230	54	Ø200
MQTL1080-X 40W	Ø230	54	Ø200

Benefits

- Die-cast aluminum housing for higher power and brightness
- Good heat dissipation, Long lifespan
- Micro prism lens or reflector for precise beam angle control

170-240V	CRI ≥80	-20~40°C	IP20	IK02	3000K/4000K/6500K
----------	---------	----------	------	------	-------------------




Black


Model	W	PF	lm	BA	Life	Single Box Dimensions (LxWxH)mm	Outer Box Dimensions (LxWxH)mm	Packing Qty (PCS/CTN)
MQTL1080-X 7W	7	0.5	560/630	60°	25000	97*75*97	410*400*215	40
MQTL1080-X 10W	10	0.5	800/900	60°	25000	123*60*130	630*265*285	40
MQTL1080-X 20W	20	0.5	1600/1800	100°	25000	172*60*178	365*325*375	20
MQTL1080-X 30W	30	0.5/0.9	2400/2700	100°	25000	233*68*235	485*433*255	12
MQTL1080-X 40W	40	0.5/0.9	3200/3600	100°	25000	233*68*235	485*433*255	12

Photometric Data


MQTL1080-X -7W

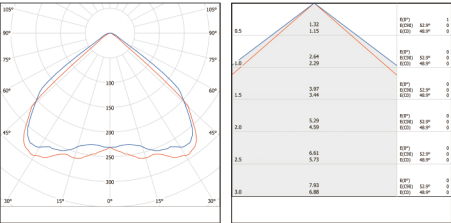


MQTL1080-X -10W

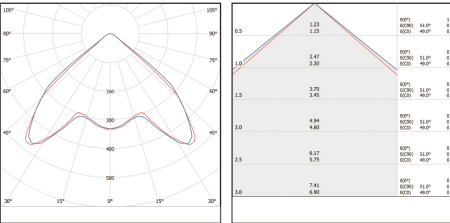

MQTL1080-X -20W

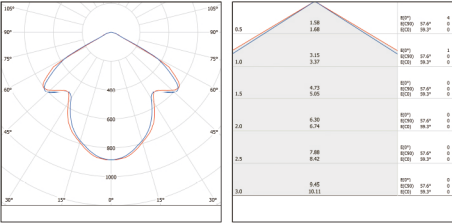

MQTL1080-X -30W

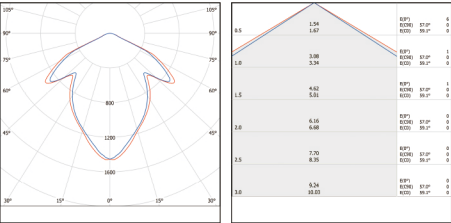

MQTL1080-X -40W

