

Model	L(mm)	H(mm)
MXTL2002 10W	75*75	95
MXTL2002 2x10W	75*145	95
MXTL2002 20W	95*95	115
MXTL2002 2x20W	95*190	110

Benefits

- Die-cast aluminum housing for higher power and brightness
- Good heat dissipation, Long lifespan
- Micro prism lens or reflector for precise beam angle control

170~240V

CRI>80

-20~40°C

IP20

IK02


3000K/4000K/6500K




Model	W	PF	lm	BA	h	Single Box Dimensions (LxWxH)mm	Outer Box Dimensions (LxWxH)mm	Packing Qty (PCS/CTN)
MXTL2002 10W	10	0.5	720/800	15/24/38/50 °	25000	85*85*115	355*270*360	36
MXTL2002 2x10W	2x10	0.5	1440/1600	15/24/38/50 °	25000	160*85*115	355*270*360	18
MXTL2002 20W	20	0.5	1440/1600	15/24/38/50 °	25000	105*105*140	435*225*435	24
MXTL2002 2x20W	2x20	0.5	2880/3200	15/24/38/50 °	25000	200*105*140	435*225*435	12

Photometric Data


MXTL2002-10W

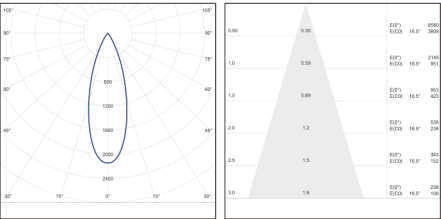

MXTL2002-2x10W

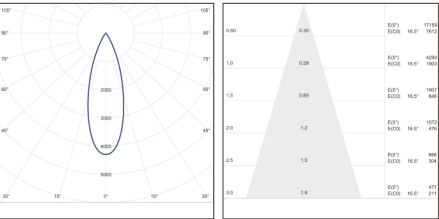

MXTL2002-20W

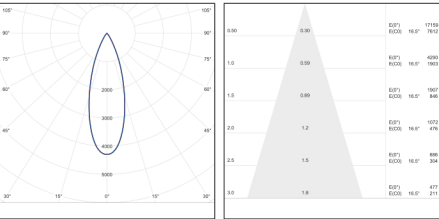

MXTL2002-2x20W

