

Benefits

- High light efficiency, more energy-saving
- High quality built-in LED driver, easy to install and maintain
- Aluminum housing for higher power and brightness

170-240V

CRI ≥ 80

-20~40°C

IP20

IK02


3000K/4000K/6500K

White

Model	W	PF	lm			Single Box Dimensions (LxWxH)mm	Outer Box Dimensions (LxWxH)mm	Packing Qty (PCS/CTN)
MXL3004 30W	30	0.5/0.9	2430/2700	120°	25000	612*60*48	632*320*217	20
MXL3004 60W	60	0.5/0.9	4860/5400	120°	25000	1212*60*48	1232*320*217	20

Photometric Data

MXL3004-30W

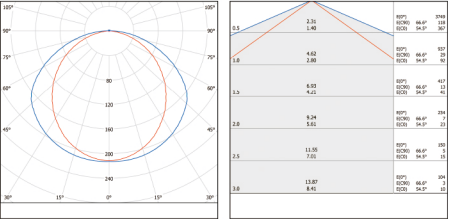

MXL3004-60W

