

Benefits

- Ultra-slim design, good installing effect
- High light efficiency, more energy-saving
- High quality built-in LED driver, easy to install and maintain
- Aluminum housing for higher power and brightness

170-240V

CRI ≥ 80

-20~40°C

IP20

IK02


3000K/4000K/6500K




Model	W	PF	lm	BA		Single Box Dimensions (LxWxH)mm	Outer Box Dimensions (LxWxH)mm	Packing Qty (PCS/CTN)
MXL2114 20W	20	0.5	1600/1800	120°	25000	625*60*37	645*260*210	20
MXL2114 40W	40	0.5/0.9	3200/3600	120°	25000	1225*60*37	1245*260*210	20
MXL2115 30W	30	0.5/0.9	2400/2700	120°	25000	625*70*37	645*300*210	20
MXL2115 40W	40	0.5/0.9	3200/3600	120°	25000	625*70*37	645*300*210	20
MXL2115 60W	60	0.5/0.9	4800/5400	120°	25000	1225*70*37	1245*300*210	20
MXL2115 80W	80	0.5/0.9	6400/7200	120°	25000	1225*70*37	1245*300*210	20

Photometric Data


MXL2114-20W

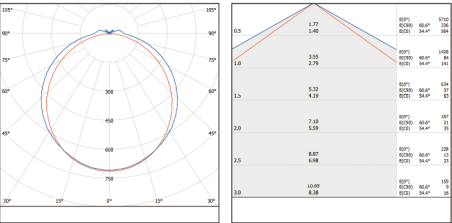


MXL2114-40W

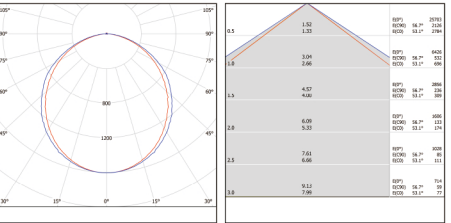


MXL2115-30W

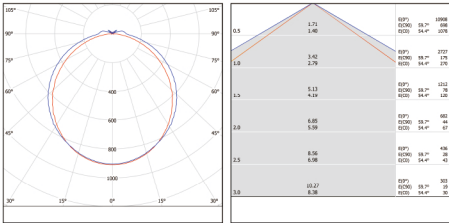

MXL2115-40W

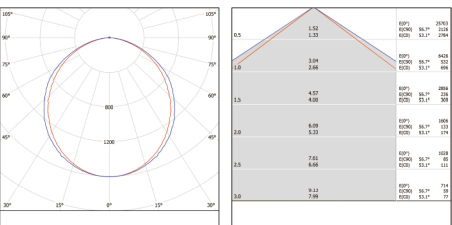

MXL2115-60W

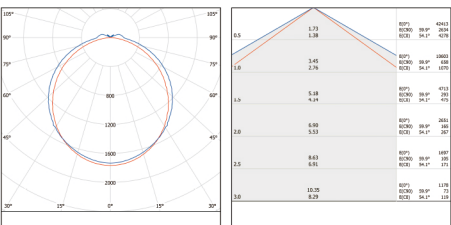

MXL2115-80W

