


Engineer | High Power Batten

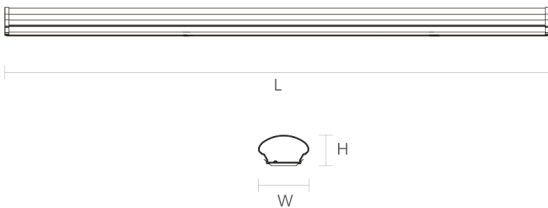

Benefits

- High light efficiency, more energy-saving
- High quality built-in LED driver, easy to install and maintain
- Aluminum housing for higher power and brightness

170-240V

CRI ≥ 80

-20~40°C

IP20

IK02


3000K/4000K/6500K




Model	W	PF	lm			Single Box Dimensions (LxWxH)mm	Outer Box Dimensions (LxWxH)mm	Packing Qty (PCS/CTN)
MXL2056 40W	40	0.5/0.9	2900/3200	120°	25000	608*115*65	628*345*250	10
MXL2056 80W	80	0.5/0.9	5800/6400	120°	25000	1208*115*65	1228*345*250	10
MXL2056 120W	120	0.5/0.9	9000/9600	120°	25000	1208*115*65	1228*345*250	10

Photometric Data

MXL2056-40W

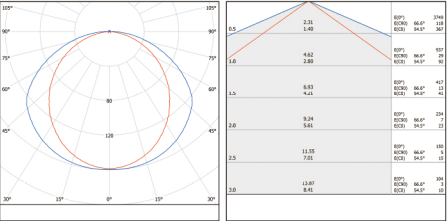

MXL2056-80W

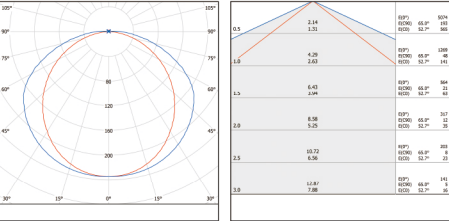

MXL2056-120W

