

Benefits

- High light efficiency, more energy-saving
- High quality built-in LED driver, easy to install and maintain
- Aluminum housing for higher power and brightness
- Motion sensor version optional

170-240V

CRI ≥ 80

-20~40°C

IP20

IK02


3000K/4000K/6500K



Model	W	PF	lm	Beam Angle	Life (h)	Single Box Dimensions (LxWxH)mm	Outer Box Dimensions (LxWxH)mm	Packing Qty (PCS/CTN)
MXL2082 20W	20	0.5	1600/1800	120°	25000	607*60*46	625*140*255	10
MXL2082 40W	40	0.5/0.9	3200/3600	120°	25000	1213*60*46	1230*140*255	10
MXL2082-PS 20W	20	0.5	1600/1800	120°	25000	657*60*46	675*140*255	10
MXL2082-PS 40W	40	0.5/0.9	3200/3600	120°	25000	1263*60*46	1280*140*255	10
MXL2082-MS 20W	20	0.5	1600/1800	120°	25000	657*60*46	675*140*255	10
MXL2082-MS 40W	40	0.5/0.9	3200/3600	120°	25000	1263*60*46	1280*140*255	10

Photometric Data

MXL2082-20W

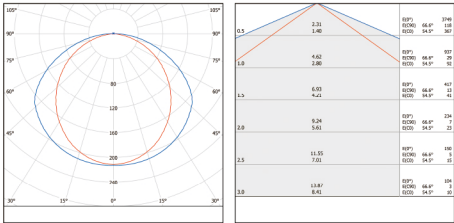

MXL2082-40W

