
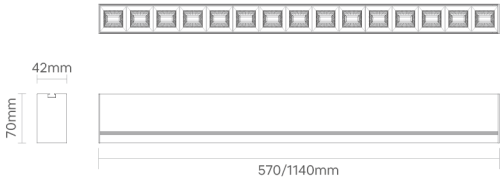


Engineer | Pendant

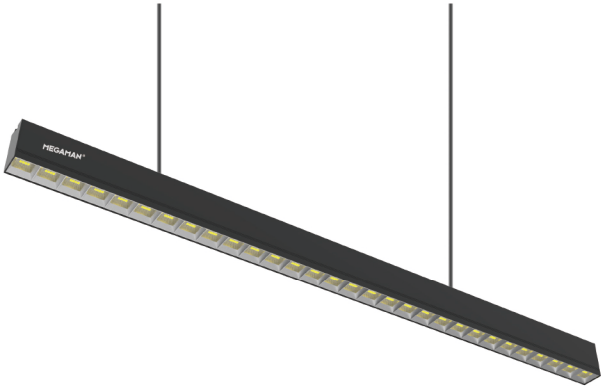

MDL1010 30W
MDL1010 60W

Benefits

- Good heat dissipation, Long lifespan
- High quality built-in LED driver, easy to install and maintain
- Aluminum housing for higher power and brightness
- Micro prism lens or reflector for precise beam angle control

170-240V

CRI ≥ 80

-20~40°C

IP20

IK02


3000K/4000K/6500K

BlackGoldenSilver

Model	W	PF	lm	Beam Angle	Life	Single Box Dimensions (LxWxH)mm	Outer Box Dimensions (LxWxH)mm	Packing Qty (PCS/CTN)
MDL1010 30W	30	0.5/0.9	2000/2250	30°	25000	600*56*75	620*250*235	12
MDL1010 60W	60	0.5/0.9	3900/4500	30°	25000	1170*56*75	1190*250*235	12

Photometric Data

MDL1010-30W

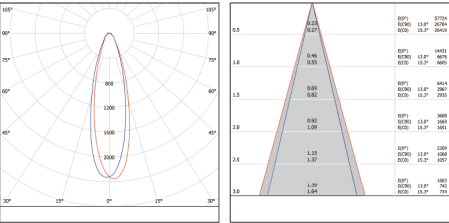

MDL1010-60W

