


Classic | Downlight

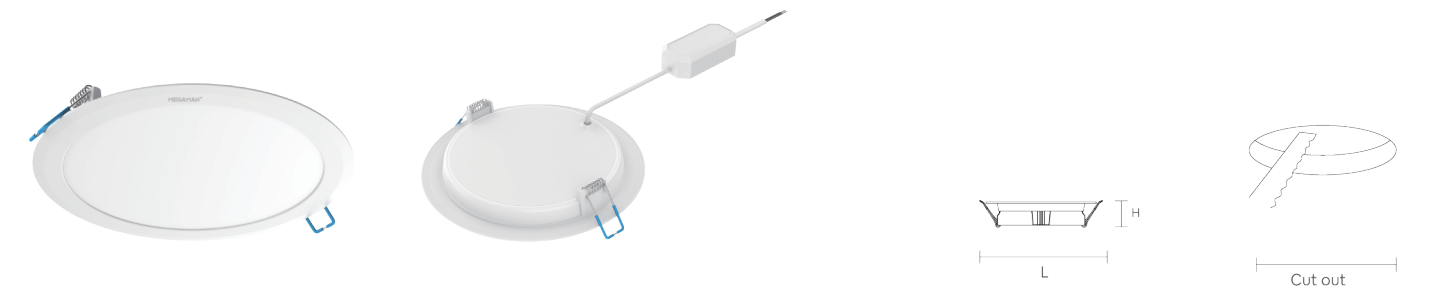

Benefits

- Independent external driver
- High luminous flux, high luminous efficiency
- Back lit, luminous uniform
- Comply with CB, Safe and reliable


170-240V	CRI >80	-20~40°C	IP20	IK02	3000K/4000K/6500K
----------	---------	----------	------	------	-------------------




Model	W	PF	lm	BA		Single Box Dimensions (LxWxH)mm	Outer Box Dimensions (LxWxH)mm	Packing Qty (PCS/CTN)
MQTL1209-Y-3' 5W	5	0.5	400/450	120°	25000	95*40*95	495*425*210	100
MQTL1209-Y-3.5' 7W	7	0.5	630/700	120°	25000	110*40*110	570*425*240	100
MQTL1209-Y-4' 9W	9	0.5	810/900	120°	25000	125*38*125	520*405*270	80
MQTL1209-Y-5' 12W	12	0.5	1200/1320	120°	25000	150*36*150	470*385*320	60
MQTL1209-Y-6' 15W	15	0.5	1500/1650	120°	25000	178*38*178	555*410*378	60
MQTL1209-Y-8' 24W	24	0.5	2400/2640	120°	25000	222*38*222	465*410*465	40

Photometric Data


MQTL1209-5W

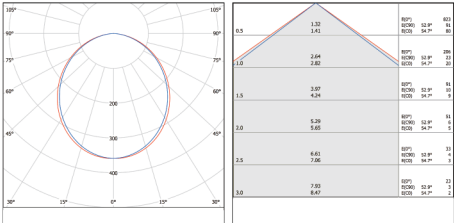


MQTL1209-7W

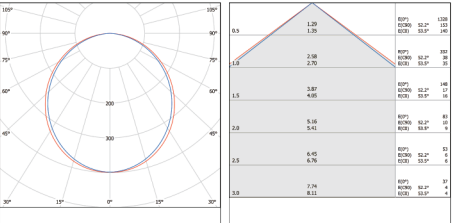


MQTL1209-9W

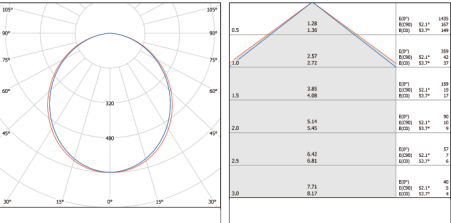

MQTL1209-12W

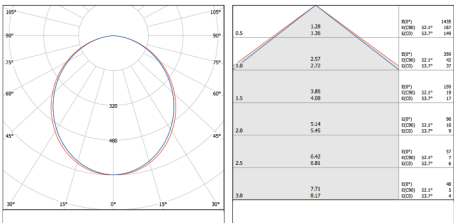

MQTL1209-15W

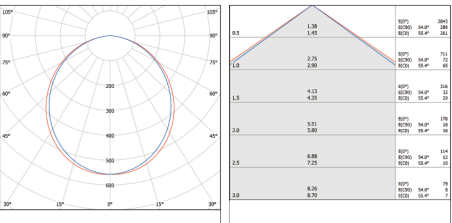

MQTL1209-24W

