


Classic | Downlight

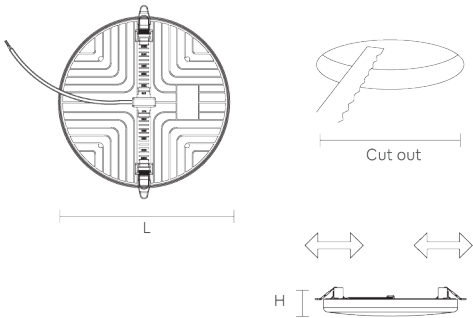

Benefits

- Frameless design, more luminous area
- Recessed with adjustable die-cut, easier to install and match
- DOB back lit, slim integrated design
- High light efficiency, 110lm/W


170-240V	CRI >80	-20~40°C	IP20	IK02	3000K/4000K/6500K
----------	---------	----------	------	------	-------------------




Model	W	PF	lm	BA		Single Box Dimensions (LxWxH)mm	Outer Box Dimensions (LxWxH)mm	Packing Qty (PCS/CTN)
MXTL1049 9W	9	0.5	900/990	120°	15000	90*38*100	475*410*220	100
MXTL1049 18W	18	0.5	1800/1980	120°	15000	125*38*125	410*395*270	60
MXTL1049 24W	24	0.5	2400/2640	120°	15000	170*45*170	470*360*190	20
MXTL1049 36W	36	0.5/0.9	3600/3960	120°	15000	225*45*225	470*245*245	10
MXTL1053 9W	9	0.5	900/990	120°	15000	90*38*100	475*410*220	100
MXTL1053 18W	18	0.5	1800/1980	120°	15000	125*38*125	410*395*270	60
MXTL1053 24W	24	0.5	2400/2640	120°	15000	170*45*170	470*360*190	20
MXTL1053 36W	36	0.5/0.9	3600/3960	120°	15000	225*45*225	470*245*245	10

Photometric Data


MXTL1049-9W



MXTL1049-18W



MXTL1049-24W



MXTL1049-36W

