


Classic | Downlight

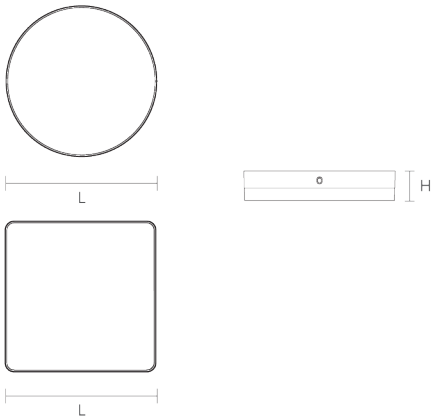

Benefits

- Integrated IC constant current or linear DOB driver, CE compliant, safe and reliable
- Up to 50% energy saving compared to conventional downlight
- Healthy lighting without ultraviolet, infrared radiation or mercury
- High-quality engineering plastic, high strength and fearless turning yellow


170-240V	CRI ≥80	-20~40°C	IP20	IK02	3000K/4000K/6500K
----------	---------	----------	------	------	-------------------




Model	W	PF	lm	BA	h	Single Box Dimensions (LxWxH)mm	Outer Box Dimensions (LxWxH)mm	Packing Qty (PCS/CTN)
MXTL1045-Y 12W	12	0.5	960/1080	120°	15000	130*41*131	545*440*280	80
MXTL1045-Y 18W	18	0.5	1440/1620	120°	15000	185*41*185	575*440*390	60
MXTL1045-Y 24W	24	0.5	1920/2160	120°	15000	230*41*230	480*440*480	40
MXTL1045-Y 30W	30	0.5	2400/2700	120°	15000	255*41*255	530*440*530	40
MXTL1045-F 12W	12	0.5	960/1080	120°	15000	130*41*131	545*440*280	80
MXTL1045-F 18W	18	0.5	1440/1620	120°	15000	185*41*185	575*440*390	60
MXTL1045-F 24W	24	0.5	1920/2160	120°	15000	230*41*230	480*440*480	40
MXTL1045-F 30W	30	0.5	2400/2700	120°	15000	255*41*255	530*440*530	40

Photometric Data


MXTL1045-12W



MXTL1045-18W



MXTL1045-24W



MXTL1045-30W

