

Classic | Downlight



Aluminum material




High quality metal spring



Benefits

- Aluminum housing and a variety of surface processes optional
- Metal high-grade clips
- Three CCT swichable temperatures for different scenes

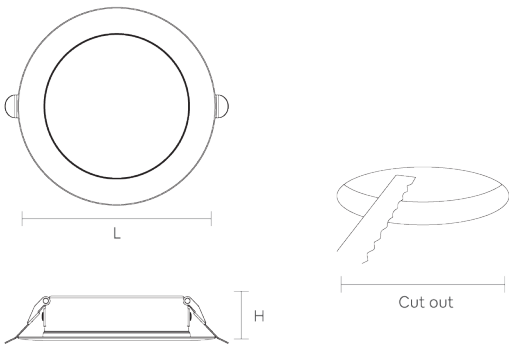

Model	L(mm)	H(mm)	Cut out(mm)
MQTL1208-Y 7W	Ø116	30	Ø90
MQTL1208-Y 9W	Ø116	30	Ø90
MQTL1208-Y 12W	Ø134	30	Ø110
MQTL1208-Y-SDC 7W	Ø116	30	Ø90
MQTL1208-Y-SDC 9W	Ø116	30	Ø90
MQTL1208-Y-SDC 12W	Ø134	30	Ø110

170-240V	CRI >80	-20~40°C	IP20	IK02	3000K/4000K/6500K
----------	---------	----------	------	------	-------------------



Model	W	PF	lm	BA	h	Single Box Dimensions (LxWxH)mm	Outer Box Dimensions (LxWxH)mm	Packing Qty (PCS/CTN)
MQTL1208-Y 7W	7	0.5	510/560	120°	25000	118*38*118	615*410*255	100
MQTL1208-Y 9W	9	0.5	660/720	120°	25000	118*38*118	615*410*255	100
MQTL1208-Y 12W	12	0.5	880/960	120°	25000	135*38*135	565*410*290	80
MQTL1208-Y-SDC 7W	7	0.5	510/560	120°	25000	118*38*118	615*410*255	100
MQTL1208-Y-SDC 9W	9	0.5	660/720	120°	25000	118*38*118	615*410*255	100
MQTL1208-Y-SDC 12W	12	0.5	880/960	120°	25000	135*38*135	565*410*290	80

Photometric Data

