
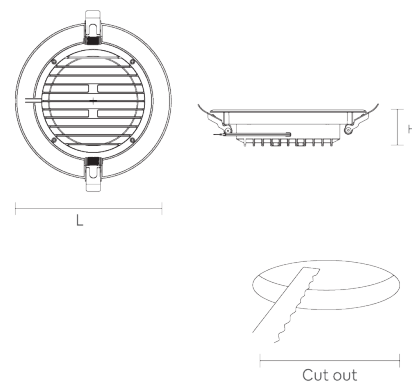


Engineer | Downlight

MEGAMAN®

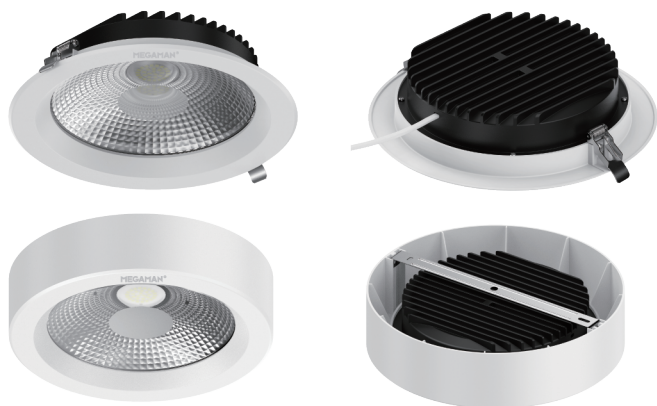

Benefits

- Plastic + Stamped aluminum heat sink, stable heat dissipation performance
- DOB driver, integrated design
- SMD mimics COB design
- Professional optical design, uniform irradiation, no spot/aperture
- Tempered glass, high strength and unbreakable


170-240V	CRI >80	-20~40°C	IP20	IK02	3000K/4000K/6500K
----------	---------	----------	------	------	-------------------

White


Model	W	PF	lm	BA	h	Single Box Dimensions (LxWxH)mm	Outer Box Dimensions (LxWxH)mm	Packing Qty (PCS/CTN)
MQTL1223 7W	7	0.5	560/630	100°	25000	95*36*95	405*390*210	80
MQTL1223 10W	10	0.5	800/900	100°	25000	122*50*122	390*265*265	60
MQTL1223 20W	20	0.5	1700/1900	85°	25000	172*53*172	538*285*365	30
MQTL1223 30W	30	0.9	2700/3000	60°	25000	230*60*230	480*320*480	20
MQTL1223-M 20W	20	0.5	1700/1900	85°	25000	175*49*175	510*370*195	20
MQTL1223-M 30W	30	0.9	2700/3000	60°	25000	235*55*235	570*255*255	10
MQTL1223-M 40W	40	0.9	3600/4000	85°	25000	300*62*300	640*320*320	10

Photometric Data


MQTL1223-7W



MQTL1223-10W



MQTL1223-20W



MQTL1223-30W

