




2 different heights



Uniform light distribution

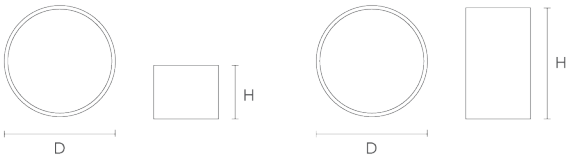

Benefits

- Extreme minimalism, simple and smooth
- Uniform light distribution
- Reflector adopts unique optical design, accurate light distribution
- Available in full series with different sizes
- Black and white housing, well adapt to different application scenes

170-240V


CRI ≥ 80

-20~40°C

IP20

IK02

3000K/4000K/6500K



Model	W	PF	lm	BA	h	Single Box Dimensions (LxWxH)mm	Outer Box Dimensions (LxWxH)mm	Packing Qty (PCS/CTN)
MXTL1003L 5W	5	0.5	350	120°	30000	110*80*110	420*240*570	50
MXTL1003L 10W	10	0.5	800	120°	30000	145*80*145	745*420*310	50
MXTL1003L 15W	15	0.5	1200	120°	30000	185*80*185	420*390*390	20
MXTL1003H 5W	5	0.5	350	120°	30000	110*110*165	570*350*350	30
MXTL1003H 10W	10	0.5	800	120°	30000	115*115*165	600*310*350	16
MXTL1003H 15W	15	0.5	1200	120°	30000	185*185*165	575*390*350	12

Photometric Data

MXTL1003

